

ACRYLIC DOOR (LEVEL 1-3)

PART#: DOOR_AND_FRAME_ASSEMBLY_ACRYLIC
PRODUCT LINE: DOORS

DESCRIPTION

The TSS Acrylic Door provides the aesthetics of a transparent glass door and the durability of strong acrylic and/or polycarbonate. Designed to withstand heavy traffic, ensure ballistic resistance, and provide clear vision of the surroundings, the TSS Acrylic Door is able to be utilized in many applications. Available in Polycarbonate or Acrylic, this door can also accommodate the addition of a transom or sidelite, and can even be integrated into an interior storefront or vestibule.

OPTIONS

- Available in 1 1/4" & 1 3/8" Coated or Uncoated Acrylic
- Available in 1 1/4" LP 1250 BR & LP 1250 All Poly
- Standard 10" or Half Vision Stainless Steel Kickplates
- Half Vision Laminate Available
- Intended for Interior Use
- Standard Lockset: Schlage ND-80 With ANSI Strike (Custom Cylindrical Lockset Prep Available)
- Standard Hardware: LSDA Light-Duty Closer & Select SL53 Continuous Hinge


RATINGS

- Glazing With U.L. Level 1-3
- Non-rated Frames With Level 1 Through 3 Fiberglass Inserts
- BL 1.75 U.L. Level 3 Door Framing

STANDARDS

- NSI Z971-1984 Safety Glazing Materials for Building
- ASTM C 1172 Standard Specification for Laminated Architectural Flat Glass
- Underwriters Laboratory 752 Standard for Bullet Resistant Equipment
- ASTM 4802 Standard Specification for Poly(Methyl Methacrylate) Acrylic Plastic Sheet

SINGLE ACRYLIC DOOR SHOWN

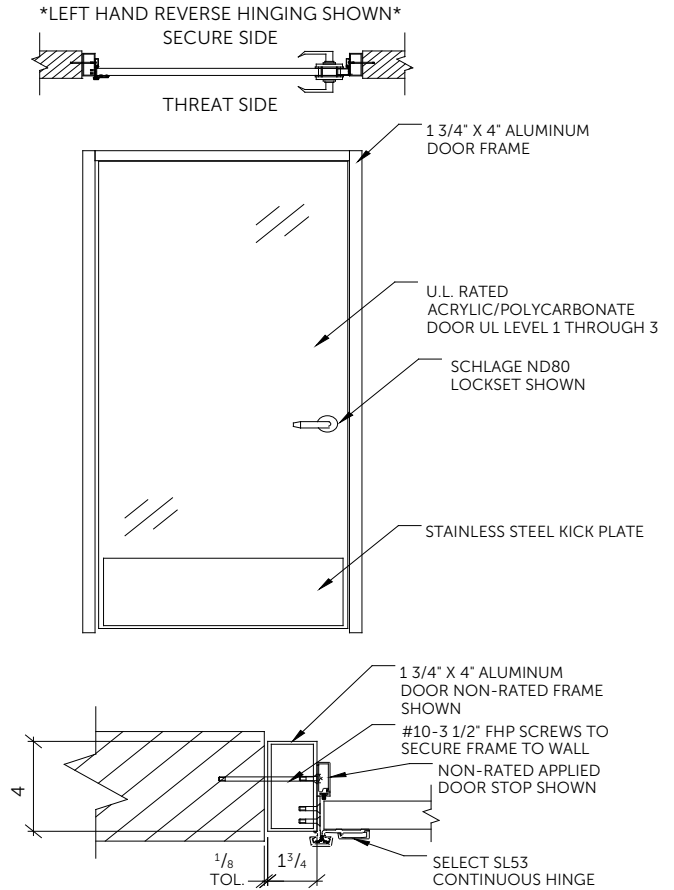

OPTION WITH SIDELITE AND TRANSOM

