

## WOOD CORE DOOR (LEVEL 1-8)

PART#: DOOR\_AND\_FRAME\_ASSEMBLY\_WOOD\_CORE

PRODUCT LINE: DOORS

### DESCRIPTION

The TSS Wood Core Doors (WCD) offer a top level of ballistic protection with the warm aesthetic look of a wood door. Available in UL Levels 1 through 8, with custom veneers & plastic laminates, as well as a wide range of custom sizes. While standard hardware is available, the TSS WCD can accommodate most hardware schedules with 1000s of different hardware preps available.

### OPTIONS

- Max Size: 3'6" X 10' 0" Door Slab
- Thickness Range: 1 3/4" to 2 3/8" (All Doors are Beveled)
- Full Vision & Door Lites Available in Acrylic, Polycarbonate, or GCP
- Intended for Interior Use
- Available in Rated or Non-Rated Aluminum (Clear, Dark Bronze, or Custom Paint/Anodize), & Hollow Metal Framing (Prime Painted with 2" or 4" Header)
- Standard 10" Stainless Steel Kickplates
- Standard Veneer: Maple Flat Cut(Paintable/Stainable)
- Standard Lockset: Schlage ND-80 With ANSI Strike (Custom Cylindrical/Mortise/Exit Device Lockset Prep Available)
- Standard Hardware: LSDA Light-Duty Closer (Level 1 & 2), LSDA Heavy-Duty Closer(Levels 3 -8), SL11 Continuous Hinge (Level 1- 3), & SL53 Continuous Hinge (Levels 4 - 8)


### RATINGS

- Glazing With U.L. Level 1-8
- Wood Core With U.L. Level 1-8
- BL 1.75 U.L. Level 3 Door Framing
- BL 5.5 U.L. Level 5-8 Door Framing (Door is 2 3/8" Thick)
- Hollow Metal Frame With Ballistic Inserts (Levels 1 -8)

### STANDARDS

- NSI Z971-1984 Safety Glazing Materials for Building
- ASTM C 1172 Standard Specification for Laminated Architectural Flat Glass
- ASTM 4802 Standard Specification for Poly(Methyl Methacrylate) Acrylic Plastic Sheet
- ASTM B 209/B 209M Standard Specification for Aluminum and Aluminum Alloy Sheet and Plate
- Underwriters Laboratory 752 Standard for Bullet Resistant Equipment

### SINGLE WOOD CORE DOOR SHOWN

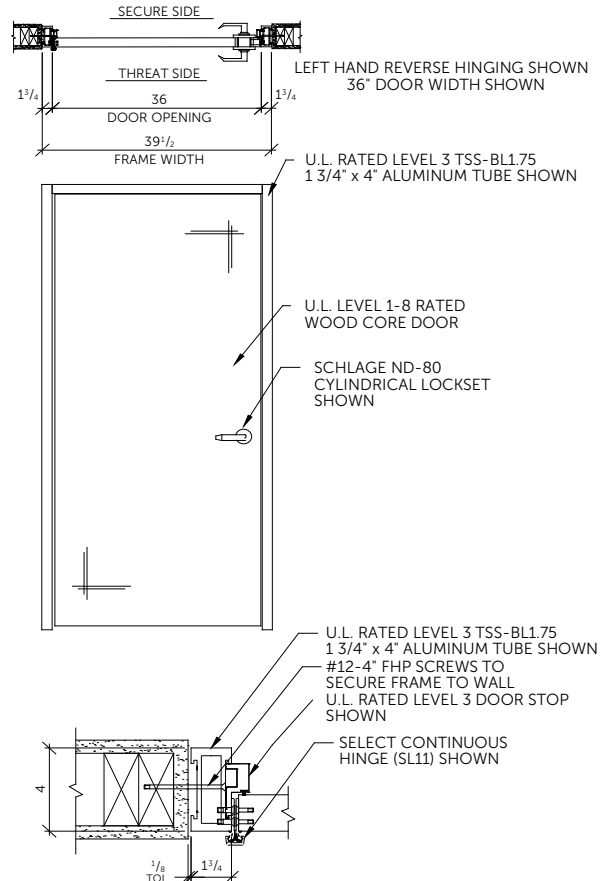

### OPTION WITH HMF FRAME & VIEW WINDOW

