PRODUCT DATA SHEET

TOTAL SECURITY SOLUTIONS

GLASS-CLAD POLYCARBONATE 1-7/8" NO SPALL (LEVEL 7)

PART#: GCP-007-1875-NS_L7 PRODUCT LINE: GLAZING

DESCRIPTION

GCP or Glass-Clad-Polycarbonate No Spall is a series of glass units that are laminated together, bonded with either poly-urethane or polyvinyl butyral layers. A layer of polycarbonate is then added to the Witness Side, often called the Secure Side of the make-up to ensure a projectile meeting the rating of the glazing unit is captured with no penetration. The polycarbonate layer also protects against any spall particles of glass projected outwards, which is where the term "No-Spall" is applied.

OPTIONS

- Reflective Glass
- One-Way Mirror
- Translucent White Interlayer (Frosted Layer)
- Tint (Gray, Bronze, Green, & Blue)
- Insulating Units
- Low E


More to choose from – Please inquire, as the size and thickness may not be available for every option.

RATINGS

• U.L. Level 7 - .223 FMJ / 5.56 NATO

STANDARDS

- NSI Z971-1984 Safety Glazing Materials for Building
- ASTM C 1036 Standard Specifications for Flat Glass
- ASTM C 1172 Standard Specificaion for Laminated Architectural Flat Glass

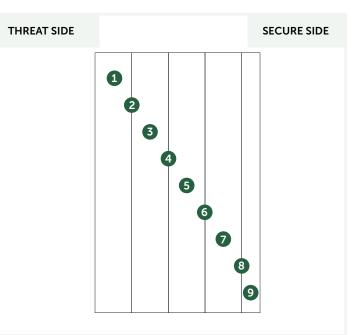

- 1. 3⁄/8" Glass
- 2. 0.025 Urethane
- 3. ¾" Glass
- 4. 0.025 Urethane
- 5. 3/8" Glass
- 6. 0.025 Urethane
- 7. 3/8" Polycarbonate
- 8. 0.05 Urethane
- 9. ¹/₄" Mar Resistant Polycarbonate

For any Tint, One-Way Mirror, Low E, or Reflecting Glass, ¹/4" glass panel must be added to make-up, increasing the glazing thickness.

PROPERTIES & SPECIFICATIONS

Protection	U.L. Level 7233 FMJ / 5.56 NATO
Ballistic Data	Velocity 1: 3185 ft/s Velocity 2: 3220 ft/s
Shots	5
Light Transmission	67%
Nominal Thickness	1 7/8"
Weight	21.32 lbs/sqft
Dimensional Tolerance	ASTM C 1349