

## GLASS-CLAD POLYCARBONATE 1-1/4" ALL GLASS DOORS (LEVEL 3)

PART#: GCP-1250-HS-LS-AGD\_L3

PRODUCT LINE: GLAZING

### DESCRIPTION

GCP or Glass-Clad-Polycarbonate Low Spall is a series of glass units that are laminated together, bonded with either poly-urethane or polyvinyl butyral layers. A layer of polycarbonate is then added to the Witness Side, often called the Secure Side of the make-up to ensure a projectile meeting the rating of the glazing unit is captured with no penetration. The polycarbonate layer is then capped with a glass layer in order to provide an all glass look. With the added layer of glass, spall (glass particals emitted) will occur when shot, but the spall spread is tested to be at a minimum, causing no physical harm. Heat strengthened glass is used for this specific make-up. Heat Strengthened glazing is the middle hardness between annealed and tempered glass. This specific make-up is only used for the TSS All-Glass-Door system and features an offset polycarbonate layer so door rails can be applied to the glazing unit.

### OPTIONS

- Reflective Glass
- One-Way Mirror
- Translucent White Interlayer (Frosted Layer)
- Tint (Gray, Bronze, Green, & Blue)
- Insulating Units
- Low E

More to choose from – Please inquire, as the size and thickness may not be available for every option.

### RATINGS


- H.P. White TP-0500.02 Level III - Forced Entry
- U.L. Level 3 – .44 Mag
- WMFL Level 1 - .44 Mag & 60 Min Physical Attack

### STANDARDS

- NSI Z971-1984 Safety Glazing Materials for Building
- ASTM C 1036 Standard Specifications for Flat Glass
- ASTM C 1172 Standard Specificaion for Laminated Architectural Flat Glass

#### THREAT SIDE

#### SECURE SIDE

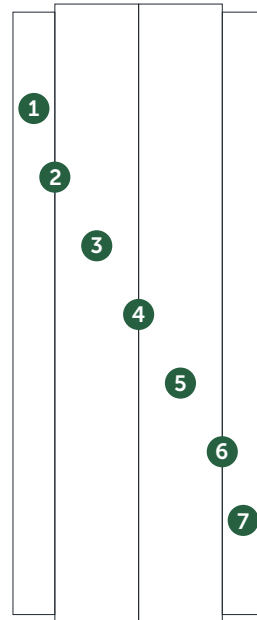

1. 1/4" Heat Strengthened
2. 0.05 Urethane
3. 3/8" Polycarbonate With 3/4" Offset at Top and Bottom
4. 0.025 Urethane
5. 3/8" Polycarbonate With 3/4" Offset at Top and Bottom
6. 0.05 Urethane
7. 1/4" Heat Strengthened

For any Tint, One-Way Mirror, Low E, or Reflecting Glass, 1/4" glass panel must be used. For this make-up, Tint, Low E, or Mirror Pane can be applied to Layer 1 and 7.

### PROPERTIES & SPECIFICATIONS

|                       |  |
|-----------------------|--|
| Protection            | U.L. Level 3 - .44 Mag                         |
| Ballistic Data        | Velocity 1: 1350 ft/s<br>Velocity 2: 1485 ft/s |
| Light Transmission    | 79%  |
| Nominal Thickness     | 1.22"  |
| Weight                | 10.6 lbs/sqft                                  |
| Dimensional Tolerance | ASTM C 1349                                    |