

## PRODUCT DATA SHEET


### ALUMINUM NATURAL VOICE TRANSMISSION (NVR) TRANSACTION WINDOW

PART#: TW\_ALUM\_NATURAL\_VOICE\_TRANSMISSION

PRODUCT LINE: WINDOWS


#### DESCRIPTION

The Aluminum Natural Voice Around Transaction Window, or NVR for short, employs the use of composite spacers built into the frame that allow sound to travel through the frame, around the bullet resistant glass. This allows for no visual obstructions of voice ports. While the framing is not UL rated, ballistic fiberglass rated UL level 1,2, and 3 can be secured within the frames to offer further bullet resistance. These windows can be packaged with a stainless steel or plastic laminate countertop, along with a currency tray, voice port, and package exchanger. The transaction window is also available as a fixed 4-sided frame. In addition, this transaction window can be applied as a system or series of connected transaction windows.

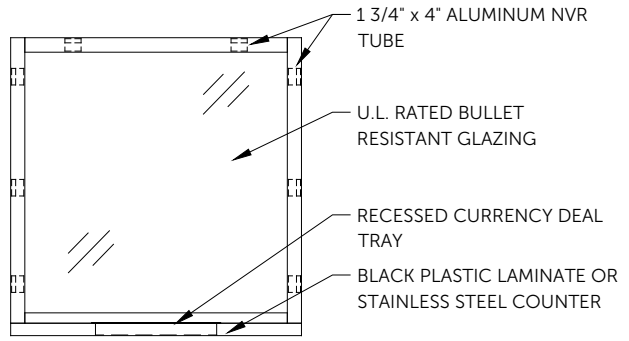

#### OPTIONS

- Intended for Interior Applications
- Available in Clear, Dark Bronze, or Custom Paint/Anodizing
- While No Minimum Exists on the Width or Height for an Aluminum NVR window, Sound Quality will Decrease as the Window Increases in Size. It is Suggested by TSS not to Exceed 60" x 60" Window Size
- Max Glazing Thickness Available is 2 1/2" (4 1/2" wide tube will be needed for glazing 2" thick and up)

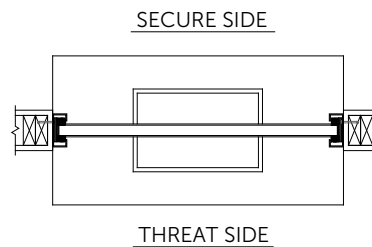

#### RATINGS

- UL Levels 1-8 Glazing Options Available
- UL Levels 1-3 Fiberglass Inserts for Framing Available

#### STANDARDS

- Underwriters Laboratory UL 752 Standard for Bullet Resistant Equipment
- ASTM B 209/B 209M Standard Specification for Aluminum and Aluminum Alloy Sheet and Plate

