


STAINLESS STEEL COUNTERTOP

PART#: STAINLESS_STEEL_COUNTERTOP

PRODUCT LINE: ACCESSORIES

DESCRIPTION

The TSS Stainless Steel Countertop uses a number 4 finish 304L 18 gauge stainless steel and can be custom made to fit most applications. A standard countertop comes with no bullet resistance rating, however, bullet resistant ratings from UL level 1 to 8 can be achieved. Stainless steel counters can be applied to any transaction window system, have the ability to house all available types of TSS deal trays and package exchangers. The counter is designed for interior and exterior applications.

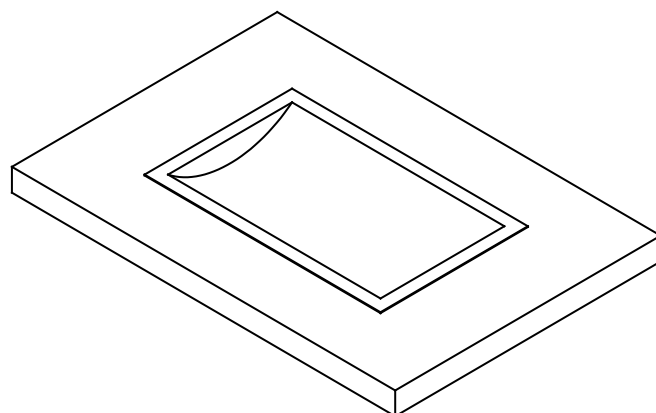

OPTIONS

- 18 Ga 304L # 4 Polished Stainless Steel
- Intended for Interior or Exterior Purposes
- Max Width Is 110" Without Seam
- Standard Thickness is 1 1/2" & 2", Custom Thicknesses Can Be Designed
- Max Depth is 42"
- Custom Designs Are Available such as T-Counters

More to choose from – Please inquire, as the size and thickness may not be available for every option.

RATINGS

- U.L. 752 Levels 1-8

STANDARDS

- Underwriters Laboratory UL 752 Standard for Bullet Resistant Equipment
- ASTM A 666 Standard Specification for Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar

PROPERTIES & SPECIFICATIONS

Protection	Level 1-8
Material	Alloy 304L
Chrome	18.00-20.00
Nickel	8.00-11.00
Carbon	.03 max
Manganese	2.0 max
Silicon	1.0 max
Brinell Hardness	160
Tensile - KSI	75
Yield - KSI	30
Elongation in 2"-%	60